OF SAUNA

Chimney set through the ceiling

Kit de conduit de cheminée passant dans le plafond

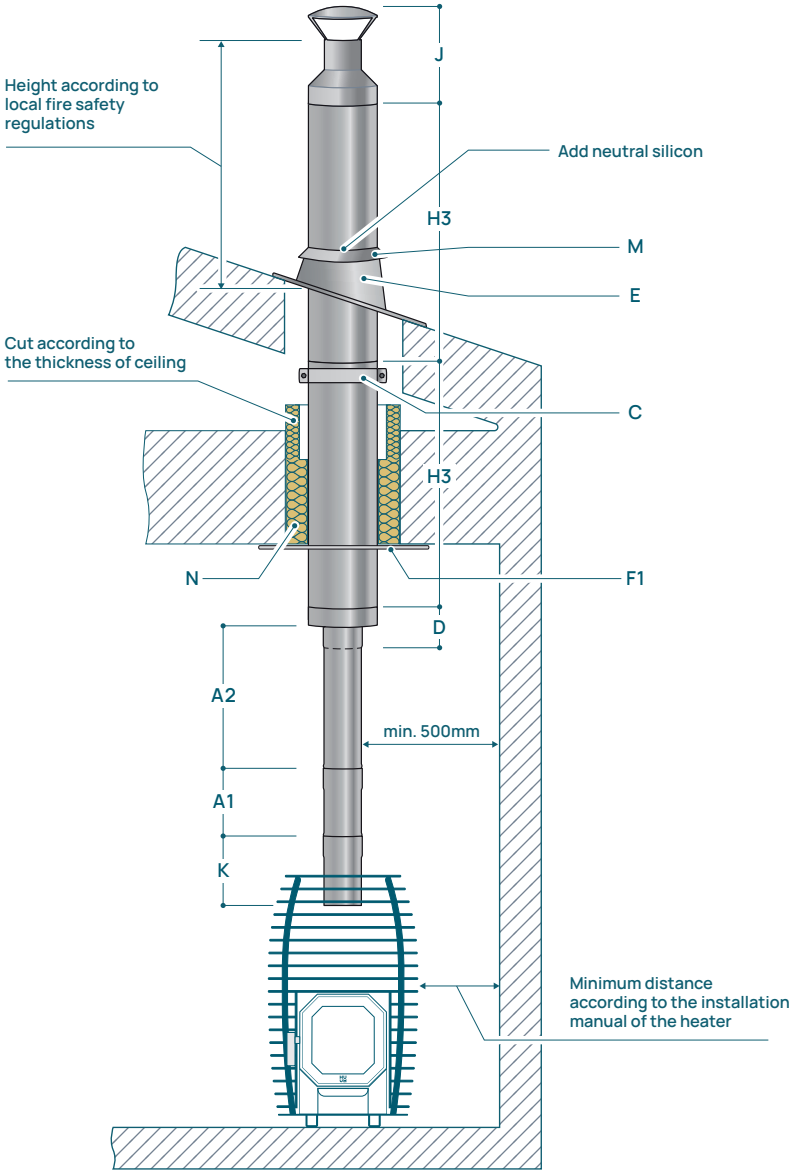

	Name/Quantity	ENG
A1	Single-wall chimney 0,25 m	
A2	Single wall chimney 0,5 m	
K	Single wall chimney adapter , cuttable 150 - 250 mm	
D	Double wall weldedchimney base	
F1	Cover plate (two parts)	
N	T600 insulation detail for ceiling	
H3	Double wall chimney 1,0 m	
C	Roof rafter attachment to the chimney	
E	Roof penetration, inclination 0 - 20 degrees	
M	Rain collar	
J	Chimney cap	

Please ensure that there is a safety distance of at **least 500mm** between the steel chimney and any combustible materials for single wall components (K, A1, A2), and a **minimum of 50mm** for double wall components (H3).

	Nom/Quantité	FRA
A1	Conduit de cheminée simple paroi 0,25 m	
A2	Conduit de cheminée simple paroi 0,5 m	
K	Adaptateur de cheminée à paroi simple, découpable 150 - 250 mm	
D	La base du conduit de cheminée est soudée.	
F1	Plaque de couverture (2 pieces)	
N	isolation T600 pour plafond	
H3	Conduit de cheminée double paroi 1,0 m	
C	Fixation des chevrons de toit à la cheminée	
E	Ouverture dans le plafond incliné est de 0-20 degrés.	
M	Corniche de protection contre la pluie.	
J	Chapeau de cheminée.	
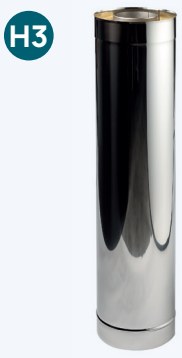
Assurez-vous qu'il y ait une distance de sécurité **d'au moins 500 mm** entre la cheminée en acier et tout matériau inflammable pour les composants à paroi simple (A1, A2) et un **minimum de 50 mm** pour les composants à double paroi (H3).